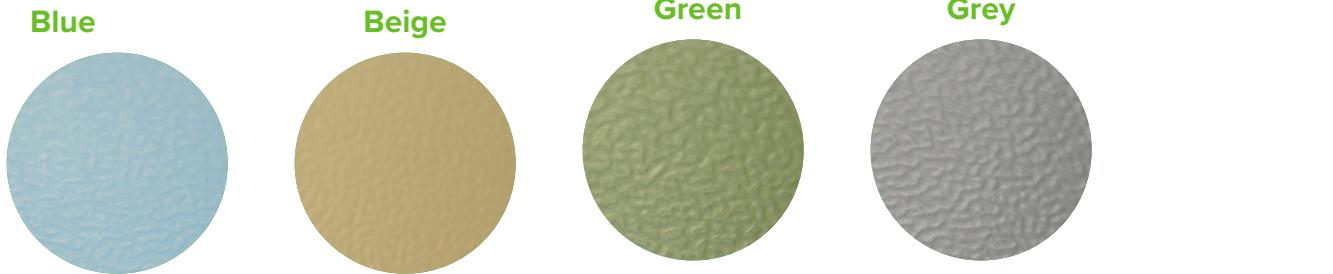

**PRODUCT**

# Premium Textured 2-Layer Antistatic Matting

## TECHNICAL DATASHEET

**DESCRIPTION**

This textured, two-layer ESD bench mat features a dissipative top layer and a conductive bottom layer. It is designed for use within EPA workspaces, offering a reflection-breaking finish that reduces glare and enhances operator comfort. Made from durable rubber, it provides protection against small collisions and is ideal for high-performance applications.

**COLOURS**

**FEATURES**

- 100% PVC and PHTALATE free
- Excellent flexibility, comfort, chemical, heat and oil resistance
- Scratch resistant
- Suitable for loose laying
- Custom bespoke sizes available on request

PRODUCT CODE	DESCRIPTION	SIZE (METRIC)	SIZE (IMPERIAL)	COLOUR	NOTES
082-0028	ESD Bench Matting - Textured Finish	1.2m x 10m	3.9ft x 32.8ft	Blue	Roll
082-0034	ESD Bench Matting - Textured Finish	1.2m x 10m	3.9ft x 32.8ft	Grey	Roll
082-0030	ESD Bench Matting - Textured Finish	1.2m x 10m	3.9ft x 32.8ft	Beige	Roll
082-0035	ESD Bench Matting - Textured Finish	1.2m x 10m	3.9ft x 32.8ft	Green	Roll
082-0024	ESD Bench Matting - Textured Finish	600mm x 1.2m	23.6in x 3.9ft	Blue	Pre-cut
082-0025	ESD Bench Matting - Textured Finish	600mm x 1.2m	23.6in x 3.9ft	Grey	Pre-cut
082-0026	ESD Bench Matting - Textured Finish	600mm x 1.2m	23.6in x 3.9ft	Beige	Pre-cut
082-0027	ESD Bench Matting - Textured Finish	600mm x 1.2m	23.6in x 3.9ft	Green	Pre-cut

Pre-cut mats are supplied with 4 x 10mm studs in each corner

To request a quotation or for more information, please call **+44 (0)1473 836200**  
 email [info@antistat.co.uk](mailto:info@antistat.co.uk) or visit [www.antistat.co.uk](http://www.antistat.co.uk)

IMPORTANT: This data sheet and its contents (the "Information") belong to Antistat or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but Antistat assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Antistat was aware of the possibility of such loss or damage arising) is excluded. © 2025 Antistat.

## Grounding

Sufficient ground cords should be used to reliably meet EN 61340-5-1 Table 3, less than  $1 \times 10^9$  ohms for working surfaces. Industry recommendation is that continuous runs of ESD matting should be grounded at 10ft intervals to allow proper charge decay rates. Each individual ESD mat should be grounded with ground snaps located no further than five feet from either end.

## Cleaning

Please note that contact between the matting surface and any acid or alkali solvent is strictly prohibited (such as Benzene, Alcohol etc), this will result in the antistatic performance degrading. If cleaning is required, the matting may be wiped with a cloth coated in a neutral solution (such as water).

## Guidance on use

Matting materials have a tendency to shrink slightly when first unrolled. In applications where length is critical, allow the material to relax for at least 4 hours before cutting to size. Matting should always be trimmed with a sharp knife or razor blade.

## Cutting tolerances

Width  $\pm$  6mm

Length  $\pm$  6mm every linear foot of running material

## TEST RESULTS

CHARACTERISTIC	STANDARD	UNIT	AVERAGE VALUES
Rgp - resistance to a groundable point	EN 61340-2-3	ohm	$< 1 \times 10^9$
Rpp - point to point resistance	EN 61340-2-3	ohm	$< 1 \times 10^9$
Hardness	ISO 48-4 (ISO 7619)	shore A	75
Residual indentation	EN/ISO 24343-1 (EN 433)	mm	$< 0.20$
Abrasion resistance	ISO 4649 (Met. A - 5N)	mm <sup>3</sup>	$< 200$
Flexibility	EN/ISO 24344 Met. A O 20mm (EN 435)	-	Comply
Cigarette burn	EN 1399	-	No burn
Slip resistance, dynamic COF	EN 13893	-	$> 0.30$
Resistance to stains	EN/ISO 26987 (EN 423)	-	Resistant *
Resistance to oils and greases (oils type 1 and 3)	ASTM D 471	-	Limited change in volume and mass

\* Depending on concentration and time of contact

To request a quotation or for more information, please call **+44 (0)1473 836200**  
 email [info@antistat.co.uk](mailto:info@antistat.co.uk) or visit [www.antistat.co.uk](http://www.antistat.co.uk)

IMPORTANT: This data sheet and its contents (the "Information") belong to Antistat or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but Antistat assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Antistat was aware of the possibility of such loss or damage arising) is excluded. © 2025 Antistat.